

# FLF OUTSIDE T5/T8 IP54/IP65 PRISMA/OPAL/PAR

FLUORESCENT LIGHT FITTINGS OUTSIDE / Prisadené svietidlá



Surfaced ceiling light with OPL – opal cover IP54, with wide use and several power versions.

**It is offered in next versions:**

with electronic ballast EVG

with electronic dimmable ballast EVG DIM

in combination with inverter (emergency KIT) (NDZ/1 hour,


Prisadené, podhľadové svietidlo s opálovým krytom so širokým uplatnením s možnosťou použitia rôznych výkonových variant.

**Je dodávané v prevedení:**

s elektronickým predradníkom EVG

s elektronickým stmievateľným predradníkom EVG DIM


v kombinácii s núdzovou jednotkou (núdzový inverter) (NDZ/1 hod, NDZ/3 hod)

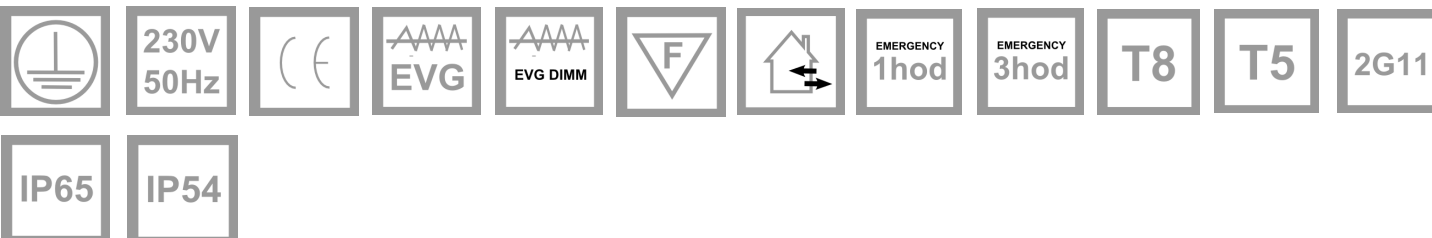

# FLF OUTSIDE T5/T8 IP54/IP65 PRISMA/OPAL/PAR

| Type / Typ           | Power<br>Výkon<br>(W) | Pätica<br>Lampholder | Optics<br>Optika | Lamp type<br>Typ zdroja | Dimensions<br>Rozmery<br>AxBxC (mm) |
|----------------------|-----------------------|----------------------|------------------|-------------------------|-------------------------------------|
| FLF 2X18W OUTSIDE T8 | 2X18W                 | G13                  | OPAL/PRISMA/PAR  | T8                      | 677x265x80                          |
| FLF 3X18W OUTSIDE T8 | 3X18W                 | G13                  | OPAL/PRISMA/PAR  | T8                      | 677x458x80                          |
| FLF 4X18W OUTSIDE T8 | 4X18                  | G13                  | OPAL/PRISMA/PAR  | T8                      | 667x458x80                          |
| FLF 2X36W OUTSIDE T8 | 2X36                  | G13                  | OPAL/PRISMA/PAR  | T8                      | 1287x265x80                         |
| FLF 3X36W OUTSIDE T8 | 3X36W                 | G13                  | OPAL/PRISMA/PAR  | T8                      | 1287x458x80                         |
| FLF 4X36W OUTSIDE T8 | 4X36W                 | G13                  | OPAL/PRISMA/PAR  | T8                      | 1287x458x80                         |
| FLF 2X58W OUTSIDE T8 | 2X58W                 | G13                  | OPAL/PRISMA/PAR  | T8                      | 1587x265x80                         |
| FLF 3X58W OUTSIDE T5 | 3X58W                 | G13                  | OPAL/PRISMA/PAR  | T8                      | 1587x465x80                         |
| FLF 4X58W OUTSIDE T5 | 4X58W                 | G13                  | OPAL/PRISMA/PAR  | T8                      | 1587x465x80                         |
| FLF 2X55W OUTSIDE T5 | 2X55W                 | 2G11                 | OPAL/PRISMA/PAR  | DULUX-L                 | 677x458x80                          |
| FLF 3X55W OUTSIDE T5 | 3X55W                 | 2G11                 | OPAL/PRISMA/PAR  | DULUX-L                 | 677x458x80                          |
| FLF 3X36W OUTSIDE T5 | 3X36W                 | 2G11                 | OPAL/PRISMA/PAR  | DULUX-L                 | 677x458x80                          |
| FLF 2X14W OUTSIDE T5 | 2X14W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 677x265x80                          |
| FLF 2X24W OUTSIDE T5 | 2X24W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 677x458x80                          |
| FLF 3X14W OUTSIDE T5 | 3X14W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 677x458x80                          |
| FLF 3X24W OUTSIDE T5 | 3X24W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 677x458x80                          |
| FLF 4X14W OUTSIDE T5 | 4X14W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 677x458x80                          |
| FLF 4X24W OUTSIDE T5 | 4X24W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 677x458x80                          |
| FLF 2X28W OUTSIDE T5 | 2X28W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 1287x265x80                         |
| FLF 2X54W OUTSIDE T5 | 2X54W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 1287x265x80                         |
| FLF 3X28W OUTSIDE T5 | 3X28W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 1287x458x80                         |
| FLF 3X54W OUTSIDE T5 | 3X54W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 1287x458x80                         |
| FLF 4X28W OUTSIDE T5 | 4X28W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 1287x458x80                         |
| FLF 4X54W OUTSIDE T5 | 4X54W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 1287x458x80                         |
| FLF 2X35W OUTSIDE T5 | 2X35W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 1587x265x80                         |
| FLF 2X49W OUTSIDE T5 | 2X49W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 1587x265x80                         |
| FLF 2X80W OUTSIDE T5 | 2X80W                 | G5                   | OPAL/PRISMA/PAR  | T5                      | 1587x265x80                         |

## Dimensions / Rozmery

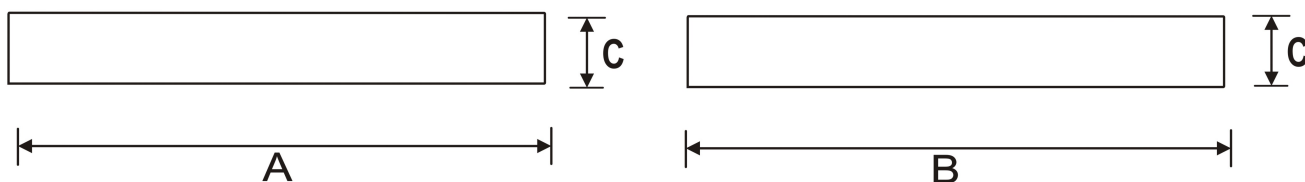

## FLF OUTSIDE T5/T8 IP54/IP65 PRISMA/OPAL/PAR

**Desing / Vyhotovenie**

*Body is made from trimmed steel sheet a thickness of 0,6 mm.*

*Surface treatment white powder coating RAL 9003.*

**OPL** – Opal cover is made from PMMA.

*Lights are constructed for easiest adjusting, change, cleaning and maintenance.*


*Teleso svietidla sú vyrobené z oceľového plechu hrúbky 0,6 mm, povrchovo upraveného práškovou farbou – komaxit RAL 9003.*

Opálový kryt je vyrobený z PMMA utesnený silikónovým tesnením a mikroporezným gumovým tesnením.


*Svietidla sú konštruované pre čo najľahšie nastavenie, výmenu, údržbu a čistenie.*

## Photometry

## OPAL 2x28W

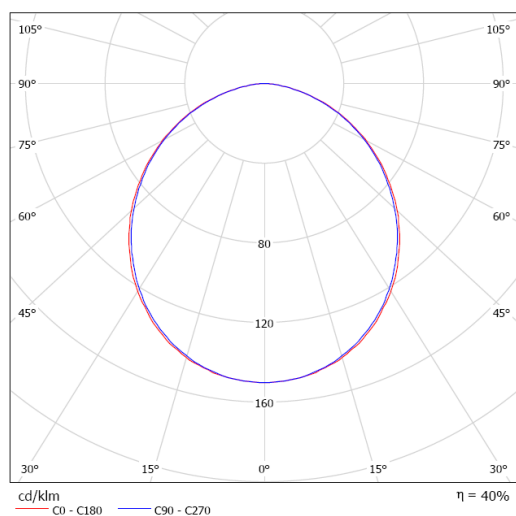

PRISMA 4X24W

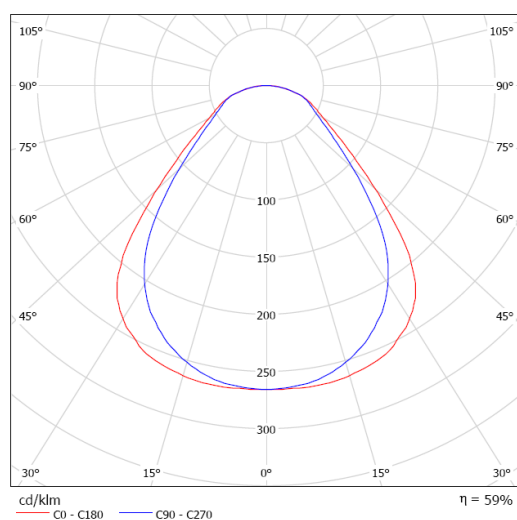

**PAR 2X36W**

