


Cable entry via elastic membranes

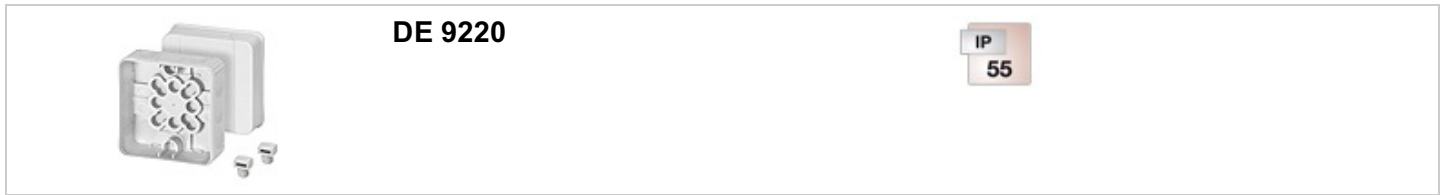

DE 9220


IP
55

- without terminals
- box walls with 10 elastic membranes, closed, sealing range Ø 3-14 mm, bottom with 2 elastic membranes, closed
- lid with clip-on attachment
- with cable retention (2 pc.) for cable tie up to 6.5 mm width
- Colour: grey, RAL 7035
- for normal environment and protected outdoor


material	PS (Polystyrene)
degree of protection:	IP 55
mounting width	71 mm
mounting height	49 mm
max. installation depth	38 mm
width	76 mm
height	76 mm
depth	53 mm
weight	0,059 kg

Drawings



Dimension drawing



Detail mass

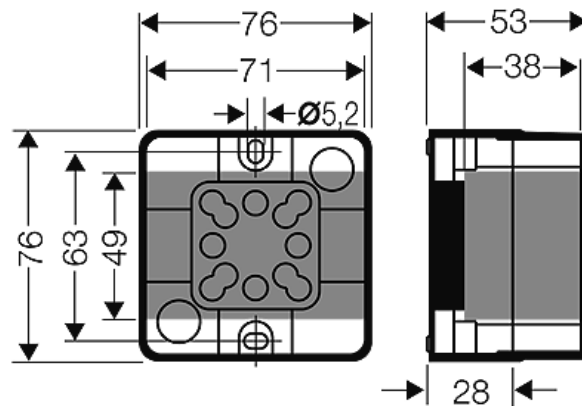

Cable entry via elastic membranes

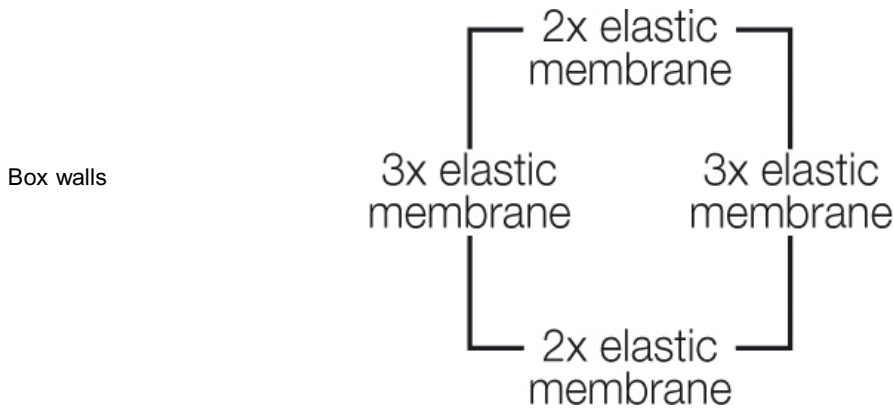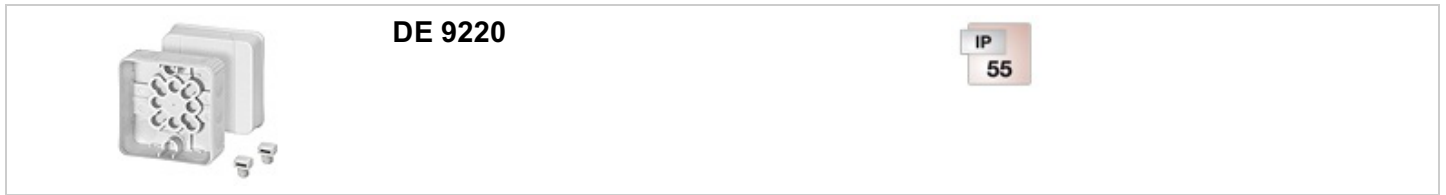

Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Ambient temperature	Maximum value + 40 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60 754-2
Note:	For material properties see technical data.