


Cable entry via elastic membranes

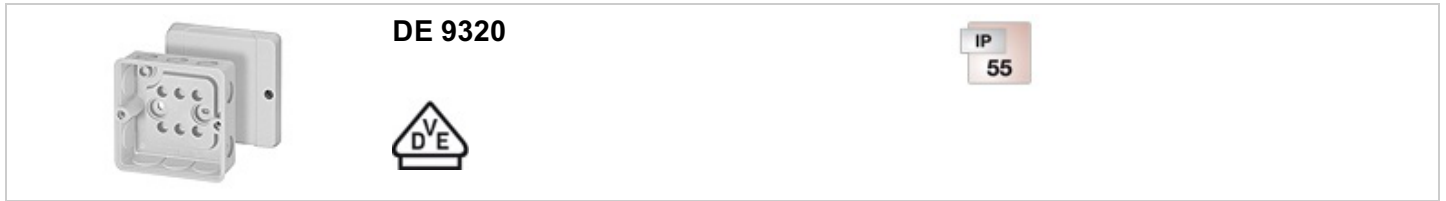


- without terminals
- 10 elastic membranes, closed cable entries, sealing range Ø 6.5-16 mm
- Colour: grey, RAL 7035
- for normal environment and protected outdoor


material	PS (Polystyrene)
degree of protection:	IP 55
mounting width	59 mm
mounting height	76 mm
max. installation depth	33 mm
width	88 mm
height	88 mm
depth	47 mm
weight	0,095 kg
in accordance with	IEC 60670-22

Drawings



Dimension drawing

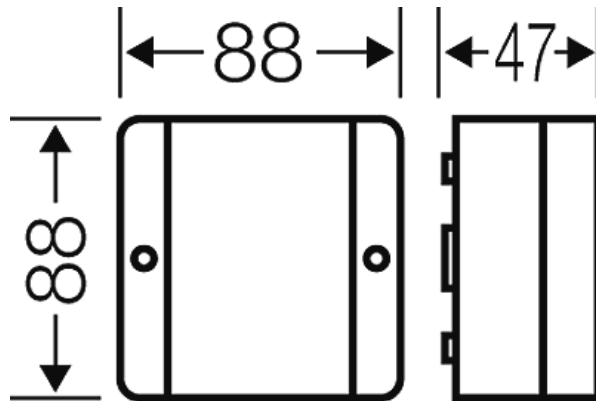

Detail mass

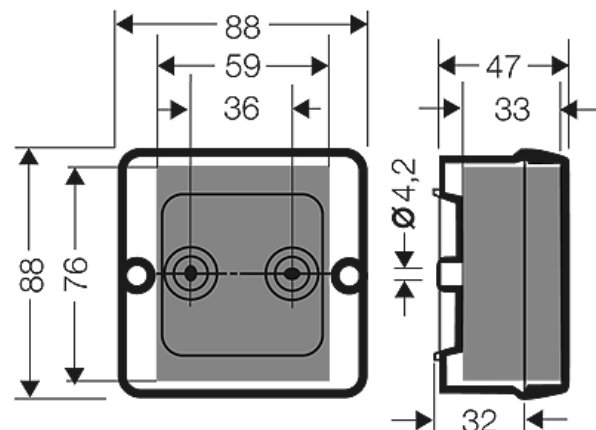

Cable entry via elastic membranes

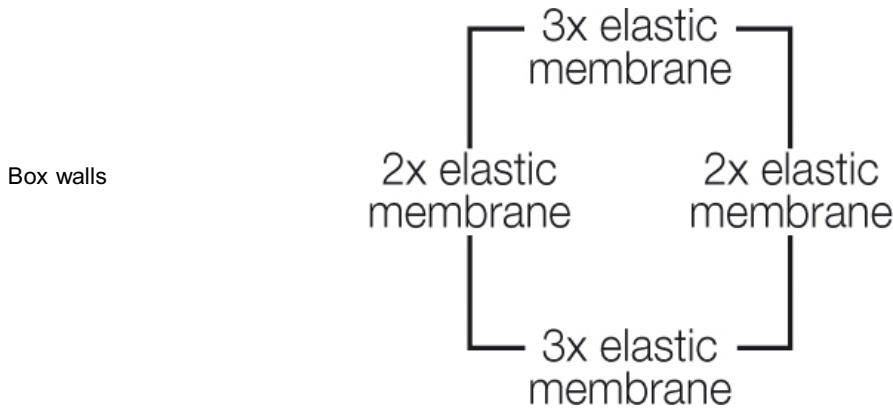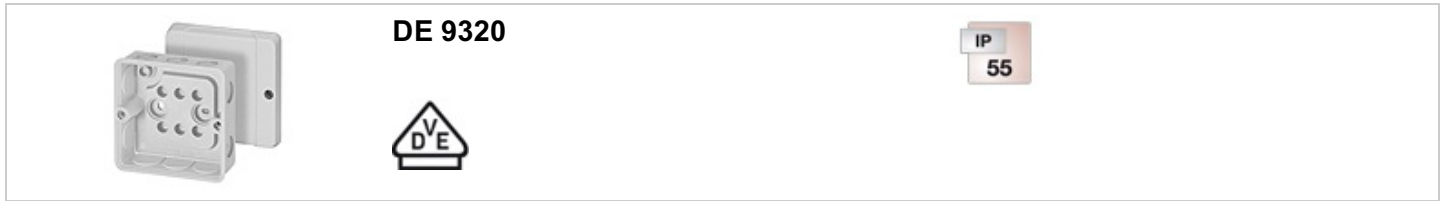

Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Ambient temperature	Maximum value + 40 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60 754-2
Note:	For material properties see technical data.