

Modern floodlight for LED light source.

TECHNICAL DATA	Mounting: on the adjustable holder, on the substrate Body: high pressure die-cast aluminum Lateral Surface Wind Exposed: 0.163 m ² Colour: gray Diffuser: tempered glass
ELECTRICAL DATA	Power supply efficiency: >92% Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED, EASY CONNECT Electrical connection: max 3x2,5 mm ² wire
OPTICAL DATA	Light distribution: circular, asymmetric-narrow, asymmetric-wide Way of lighting: direct Type of optic: lens
GENERAL DATA	Lifetime (L70B50): 50 000 h Operating temperature range: -30°C ... +35°C Available on request: LLOC, DALI, DIM 1..10V Warranty: 5 years Application: industrial facilities, warehouses, metro, parking areas, facades




Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Beam angle: 25°							
120202.5L011.1X	144	151	18200	15100	100	4000	>70
120202.5L021.1X	144	151	20400	16900	112	5700	>70
120202.5L031.1X	144	151	21200	17600	117	6500	>70
Beam angle: 50°							
120202.5L011.2X	144	151	18200	14900	99	4000	>70
120202.5L021.2X	144	151	20400	16700	111	5700	>70
120202.5L031.2X	144	151	21200	17400	115	6500	>70
Beam angle: asymmetric-narrow							
120202.5L011.3X	144	151	18200	14600	97	4000	>70
120202.5L021.3X	144	151	20400	16400	109	5700	>70
120202.5L031.3X	144	151	21200	17000	113	6500	>70
Beam angle: asymmetric-wide							
120202.5L011.4X	144	151	18200	14500	96	4000	>70
120202.5L021.4X	144	151	20400	16200	107	5700	>70
120202.5L031.4X	144	151	21200	16900	112	6500	>70

120202.5L011.1



- Type of equipment
- 1 STANDARD
 - 2 EASY CONNECT

Luminous flux tolerance +/- 10%.

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
Beam angle: 25°				
120202.5L011.1X	403 405 95	24	3	8.8
120202.5L021.1X	403 405 95	24	3	8.8
120202.5L031.1X	403 405 95	24	3	8.8
Beam angle: 50°				
120202.5L011.2X	403 405 95	24	3	8.8
120202.5L021.2X	403 405 95	24	3	8.8
120202.5L031.2X	403 405 95	24	3	8.8
Beam angle: asymmetric-narrow				
120202.5L011.3X	403 405 95	24	3	8.8
120202.5L021.3X	403 405 95	24	3	8.8
120202.5L031.3X	403 405 95	24	3	8.8
Beam angle: asymmetric-wide				
120202.5L011.4X	403 405 95	24	3	8.8
120202.5L021.4X	403 405 95	24	3	8.8
120202.5L031.4X	403 405 95	24	3	8.8




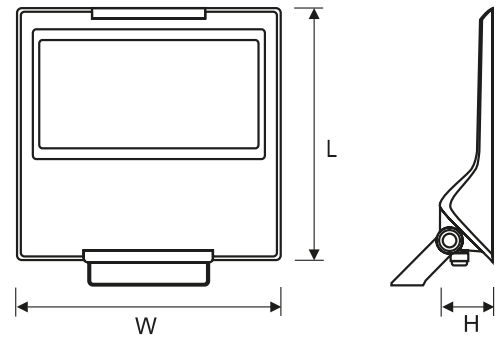


OTHER PICTURES



EASY CONNECT

LIGHT BEAM CURVES

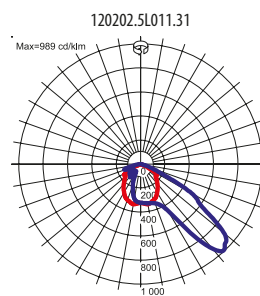

Luminous flux tolerance +/- 10%.