
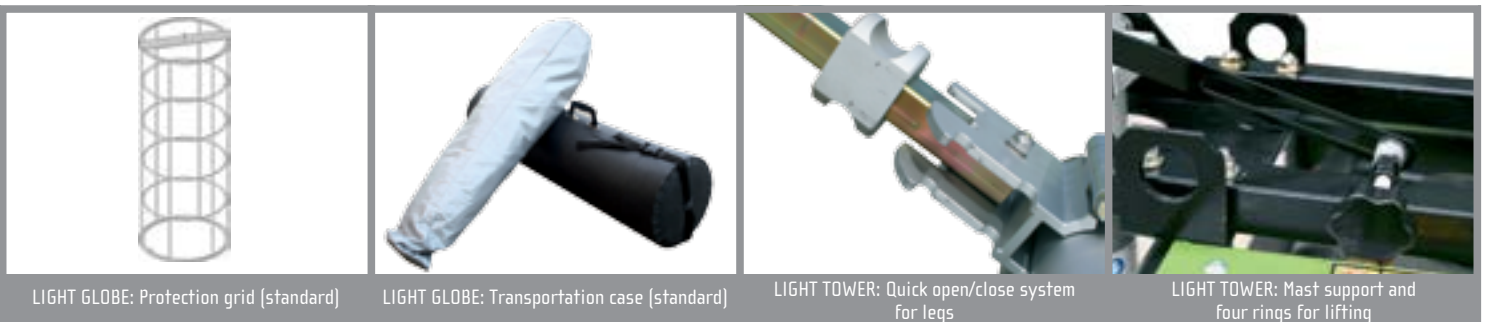


LIGHT GLOBE & LIGHT TOWER LIGHTING EQUIPMENT

POWERFUL LIGHT

With a high luminosity power, the LIGHT GLOBE and LIGHT TOWER are the innovative easy-to-use solutions for many activities: sport events, building yards, night harvest, emergency needs.

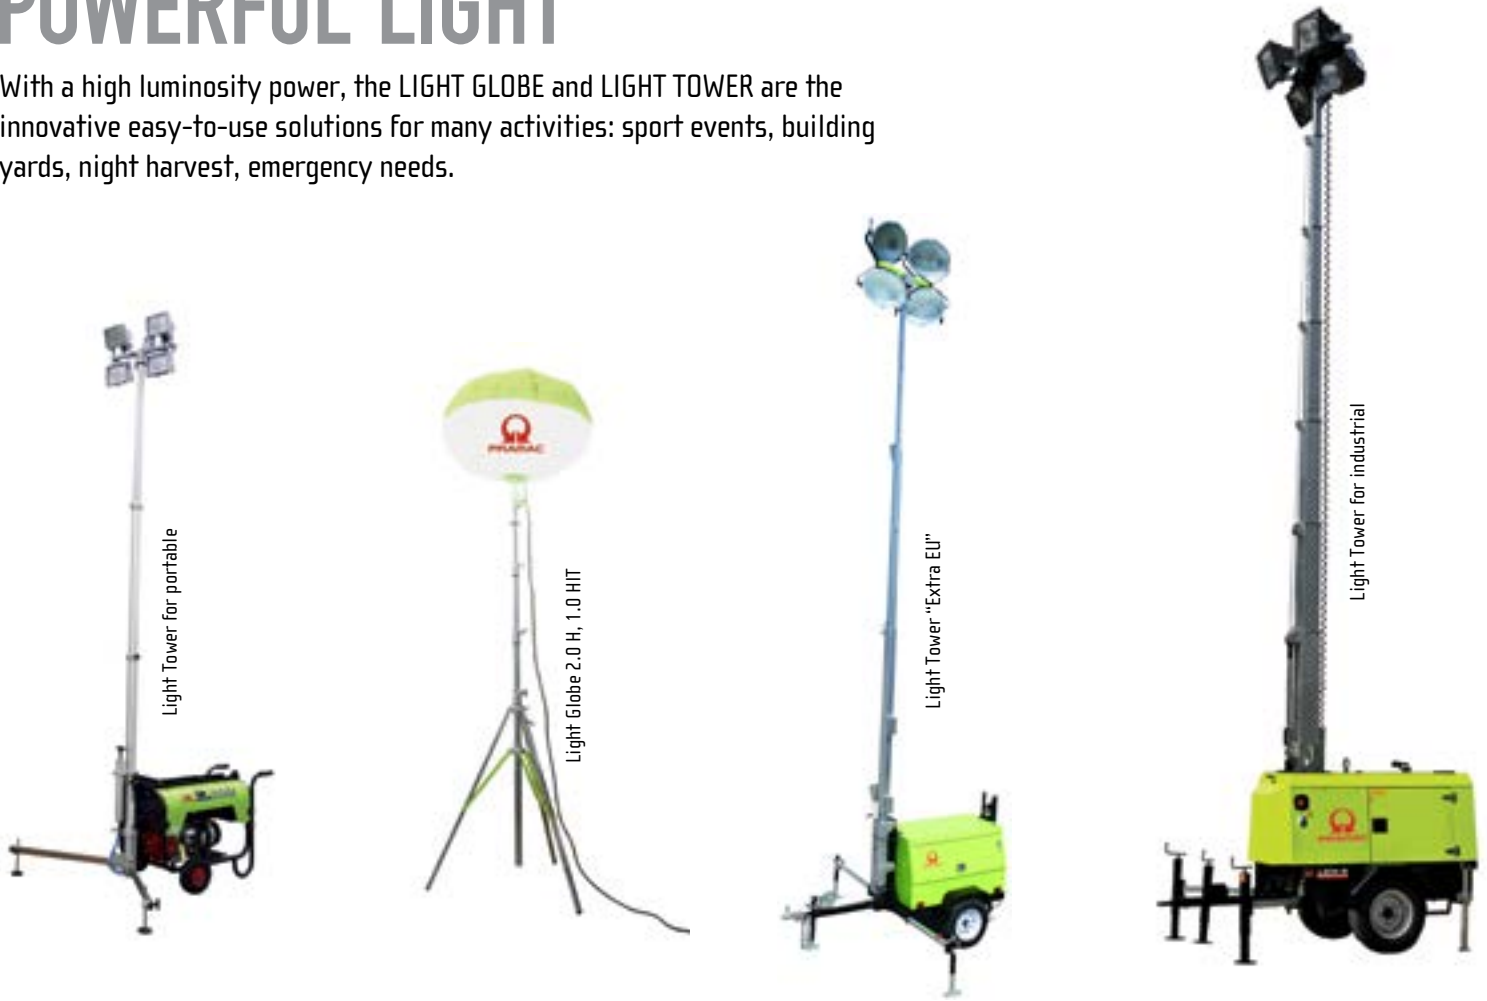

LIGHT GLOBE: Protection grid (standard)

LIGHT GLOBE: Transportation case (standard)

LIGHT TOWER: Quick open/close system for legs

LIGHT TOWER: Mast support and four rings for lifting

	GLOBE DIAMETER	LIT UP AREA	LUMEN	VOLTAGE/FREQ	MAST	PROTECTION	LAMP	MAX WIND SPEED	MAX HEIGHT	OPERATION TEMPERATURE	WEIGHT
	cm	m ²		V/Hz		LEVEL	W/type	Km/h	m	°C	Kg
LIGHT GLOBE 750 H	55	310	11400	230/50	Included	IP 54	750 W Halogen	30	2,8	-25/+45	5
LIGHT GLOBE 2.0 H	90	1500	54000	230/50	Optional	IP 54	2000 W Halogen	100	5,0	-25/+45	10
LIGHT GLOBE 1.0 HIT	120	3000	110000	230/50	Optional	IP 54	1000 W HIT*	100	5,0	- 25/+45	20*

	LAMP	LUMEN	LIT UP AREA	LAMP	VOLTAGE/FREQ	ELEVATION	LAMP AUTONOMY	MAX HEIGHT	OPERATION TEMPERATURE	PROTECTION	WEIGHT
	W	lm	m ²	type	V/Hz	type	hours	m	°C	LEVEL	Kg
LIGHT TOWER 500Wx4 for Portable*	2000	38000	700	Halogen	230/50	Pneumatic	2000	4	-5/+130	IP 65	9
LIGHT TOWER 1000Wx4 for Portable*	4000	88000	1500	Halogen	230/50	Pneumatic	2000	4	-5/+130	IP65	15
LIGHT TOWER 400Wx6	2400	192000	2500	Metal Halide	400/50	Hydraulic	5000	9,0	-5/+130	IP 55	630
LIGHT TOWER 1500Wx6	9000	200000	1200	Halogen	400/50	Hydraulic	4000	9,0	-5/+130	IP 55	630
LSW 6K**	4000	404000	up to 4000	Metal Halide	230/50	Manual	10000	9,2	-5/+130	IP 55	680
LSW 9	4000	360000	4200	Metal Halide	230/50	Hydraulic	9000	9,0	-5/+130	IP 66	970

* Elevation type (Compressed air) | Telescopic shaft sliding sections (3) - ** Extra EU