


# Wall Mount Cabinets Single Section TOP

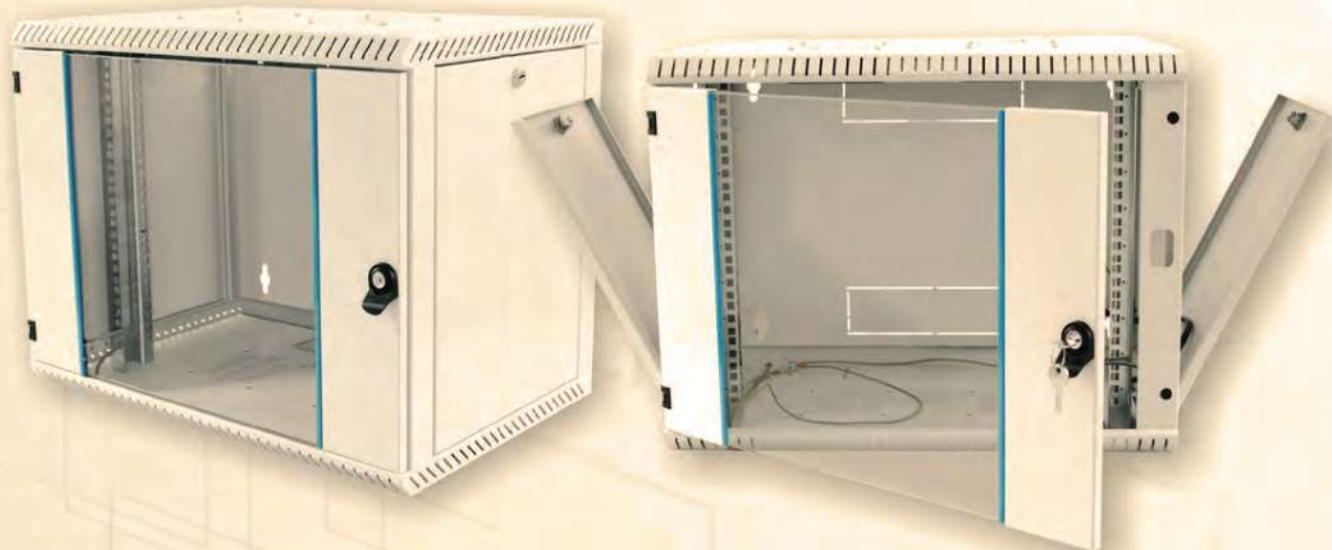

## Features

- Sheet steel housing with welded frame, completely pre-assembled, self ventilated,
- Surface finish: powder painted in RAL 7035 - light grey (Application of other colors on request),
- Protection IP20 in accordance with PN 92/E-08106 / EN 60 529 / IEC 529. (doesn't apply to brush cable entries),
- For indoor use,
- Pre-assembled for mounting of fans in base plate and top (Ventilation Module 1 x Fan for wall mounting cabinets - 24011100),
- Cables let in entry optionally either from roof or base, or through top or bottom of the rear side of cabinet, pre-punched opening (Dimensions: 250 x 70 mm),
- Front door: with window made of safety glass (optionally: full steel), opening angle 180 degrees, lockable with latch. Door stop possible on the right and left side,
- Removable and lockable side walls,
- Front door and side walls earthed on the inside.
- Profile rails positioned on the inside front , width 482,6 mm (19"), depth adjustable. Horizontal profile rails with 25 mm. hole spacing for fixing and depth adjustment of the 19" profile rails. Minimum distance from the front door and front profile rails - 31,5 mm. Cabinet can be equipped with additional rear adjustable 19" mounting profiles,

Maximum spacing between front and rear profile rails:

- Cabinet depth 400 mm - max 335 mm
- Cabinet depth 500 mm - max 435 mm
- Cabinet depth 600 mm - max 535 mm

- Wide range of supplementary accessories: shelves, fan units, light units, power distribution units, blanking covers, cable management accessories etc,
- Delivery in secure transport carton.


## Available dimensions

Type	Dimensions [mm]			Weight [kg]	Load capacity [kg]	Index
	Width	Depth	Height			
4U	600	400	240	15,7	50	11031401.1V
6U	600	400	330	19,1	50	11032401.1V
9U	600	400	464	22,1	50	11033401.1V
12U	600	400	597	25,9	50	11035401.1V
15U	600	400	730	29,7	50	11036401.1V
18U	600	400	860	33,5	50	11037401.1V
21U	600	400	997	37,4	50	11039401.1V
6U	600	500	330	19,5	50	11032501.1V
9U	600	500	465	22,5	50	11033501.1V
12U	600	500	600	26,3	50	11035501.1V
15U	600	500	730	30,1	50	11036501.1V
18U	600	500	865	33,9	50	11037501.1V
21U	600	500	997	37,8	50	11039501.1V
9U	600	600	465	22,9	50	11033601.1V
12U	600	600	600	26,7	50	11035601.1V
15U	600	800	730	30,5	50	11036601.1V
18U	600	800	864	34,3	50	11037601.1V
21U	600	600	997	38,2	50	11039601.1V

## Accessories supplied

- 1 x brush terminal,
- 1 x set of captive nuts (16 pcs.),
- 2 x keys for front door and side panels.

# Wall Mount Cabinets Single Section STANDARD

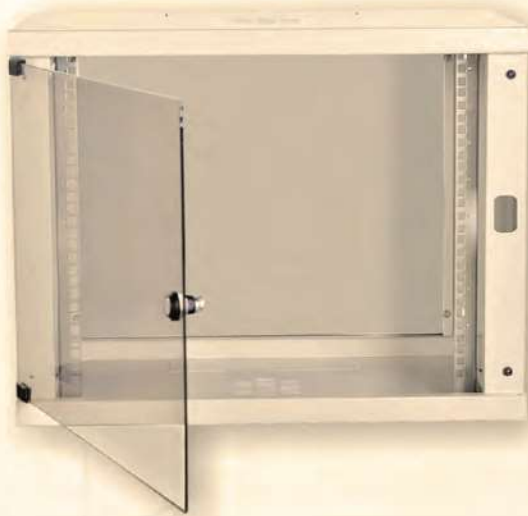

## Features


- Sheet steel housing with welded frame, completely pre-assembled, self ventilated,
- Surface finish: powder painted in RAL 7035 - light grey (Application of other colors on request),
- Protection IP20 in accordance with PN 92/E-08106 / EN 60529 / IEC 529. (doesn't apply to brush cable entries),
- For indoor use,
- Pre-assembled for mounting of fans in base plate and top (Ventilation Module 1 x Fan for wall mounting cabinets - 24011100).
- Cables let in entry optionally either from roof or base, pre-punched opening. (dimensions: 250 x 70 mm), or by rear part,
- Cabinet delivered without back panel. Optionally rear blanking panel screw down by four screws from inside,
- Front door: fully made of safety glass, opening angle 180 degrees, lockable with latch. Door stop possible on the right and left side,
- Profile rails positioned on the inside front ,width 482,6 mm (19"), depth adjustable. Horizontal profile rails with 25 mm. hole spacing for fixing and depth adjustment of the 19" profile rails. Minimum distance from the front door and front profile rails - 31,5 mm,
- Cabinet can be equipped with additional rear adjustable 19" mounting profiles,
- Maximum spacing between front and rear profile rails:
  - Cabinet depth 400mm - max 335 mm.
- Wide range of supplementary accessories: shelves, fan units, light units, power distribution units, blanking covers, cablemanagement accessories etc,
- Delivery in secure transport carton.

## Accessories supplied

- 1 x brush terminal,
- 1 x set of captive nuts (16 pcs.),
- 2 x keys for front door.

## Available dimensions

Type	Dimensions [mm]			Weight [kg]	Load capacity [kg]	Index
	Width	Depth	Height			
6U	600	400	330	16,1	50	11082401.1V
9U	600	400	465	18,4	50	11083401.1V
12U	600	400	600	21,4	50	11085401.1V
15U	600	400	730	24,6	50	11086401.1V

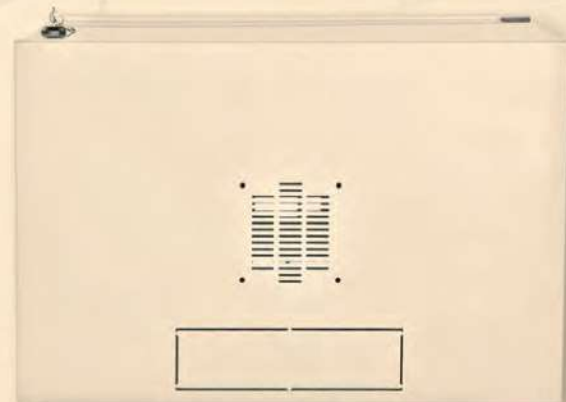

# Wall Mount Cabinets Two Section TOP



## Features

- Sheet steel housing with welded frame, completely pre- assembled, self ventilated,
- Surface finish: powder painted in RAL 7035 - light grey (Application of other colors on request),
- Protection IP20 in accordance with PN 92/E-08106 / EN 60 529 / IEC 529. (doesn't apply to brush cable entries),
- For indoor use,
- Consist of two basic parts:
  - 19" part with window made of safety glass door
  - Wall mounted part with four cable entry
- Pre-assembled for mounting of fans in base plate and top (Ventilation Module 1 x Fan for wall mounting cabinets - 24011100),
- Cables let in entry optionally either from roof or base, or through top or bottom of the rear side of cabinet, pre-punched opening (Dimensions: 250 x 70 mm),
- Front door: with window made of safety glass (optionally: full steel), opening angle 180 degrees, lockable with latch. Door stop possible on the right and left side,
- Front door and swivel frame (back part of the cabinet) earthed on the inside,
- Profile rails positioned on the inside front , width 482,6 mm (19"), depth adjustable. Horizontal profile rails with 25 mm. hole spacing for fixing and depth adjustment of the 19" profile rails. Minimum distance from the front door and front profile rails - 31,5 mm. Cabinet can be equipped with additional rear adjustable 19" mounting profiles,
- Maximum spacing between front and rear profile rails:
  - Cabinet depth 500 mm - max 435 mm
  - Cabinet depth 600 mm - max 535 mm
- Possibility to open the back wall-mounted section only after opening the front door,
- Wide range of supplementary accessories : shelves, fan units, light units, power distribution units, blanking covers, cable management accessories etc,
- Delivery in secure transport carton.

## Available dimensions

Type	Dimensions [mm]			Weight [kg]	Load capacity [kg]	Index
	Width	Depth	Height			
6U	600	500	330	19,1	40	11042501.1V
9U	600	500	465	22,1	40	11043501.1V
12U	600	500	600	25,9	40	11045501.1V
15U	600	500	730	29,7	50	11046501.1V
18U	600	500	860	33,5	50	11047501.1V
21U	600	500	997	37,4	50	11049501.1V
4U	600	600	240	16,1	30	11041601.1V
6U	600	600	330	19,5	40	11042601.1V
9U	600	600	465	22,5	40	11043601.1V
12U	600	600	600	26,3	40	11045601.1V
15U	600	600	730	30,1	50	11046601.1V
18U	600	600	860	33,9	50	11047601.1V
21U	600	600	997	37,8	50	11049601.1V

## Accessories supplied

- 1 x brush terminal,
- 1 x set of captive nuts (16 pcs.),
- 2 x keys for front door and side panels.



## Features

- Sheet steel housing with welded frame, completely pre-assembled, self ventilated,
- Surface finish: powder painted in RAL 7035 - light grey (Application of other colors on request),
- Protection Ip20 in accordance with PN 92/E-08106 / EN 60 529 / IEC 529. (doesn't apply to brush cable entries),
- For indoor use,
- Consist of two basic parts:
  - 19" part with safety glass door
  - Wall mounted part with four cable entries
- Pre-assembled for mounting of fans in base plate and top (Ventilation Module 1 x Fan for wall mounting cabinets - 24011100),
- Cables let in entry optionally either from roof or base, or through top or bottom of the rear side of cabinet, pre-punched opening (Dimensions: 250 x 70 mm),
- Front door: fully made of safety glass, opening angle 180 degrees, lockable with latch. Door stop possible on the right and left side,
- Profile rails positioned on the inside front, width 482,6 mm (19"), depth adjustable. Horizontal profile rails with 25 mm hole spacing for fixing and depth adjustment of the 19" profile rails,
- Minimum distance from the front door and front profile rails - 31,5 mm. Cabinet can be equipped with additional rear adjustable 19" mounting profiles,
- Maximum spacing between front and rear profile rails:
  - Cabinet depth 500 mm - max 435 mm
- Swivel frame (back part of the cabinet) earthed on the inside,
- Possibility to open the back wall-mounted section only after opening the front door,
- Wide range of supplementary accessories : shelves, fan units, light units, power distribution units, blanking covers, cable management accessories etc,
- Delivery in secure transport carton.

## Accessories supplied

- 1 x brush terminal,
- 1 x set of captive nuts (16 pcs.),
- 2 x keys for front door.

## Available dimensions

Type	Dimensions [mm]			Weight [kg]	Load capacity [kg]	Index
	Width	Depth	Height			
4U	600	500	240	13,2	50	11091501.1V
6U	600	500	330	16,1	50	11092501.1V
9U	600	500	465	18,4	50	11093501.1V
12U	600	500	600	21,4	50	11095501.1V
15U	600	500	730	24,6	50	11096501.1V