

## S 7 T5/T8 IP65

WATERPROOF LIGHTS / Prachotesné svietidlá



*Waterproof luminary with protection IP 65. Wide use, several power variants.*

**Available in versions:**

*with electronic ballast EVG*

*with electronic dimmable ballast EVG DIM*

*in combination with emergency unit (emergency KIT) (NDZ/1 hour, NDZ/3 hour)*

*Vodotesné svietidlo s krytím IP 65 so širokým uplatnením s možnosťou použitia rôznych výkonových variant a prevedení.*

**Je dodávané v prevedení:**

*s elektronickým predradníkom EVG*


*s elektronickým stmievateľným predradníkom EVG DIM*

*v kombinácii s núdzovou jednotkou (núdzový invertor) (NDZ/1 hod, NDZ/3 hod)*




Type / Typ	Power Výkon (W)	Pätica Lampholder	Weight Hmotnosť (kg)	Lamp type Typ zdroja	Dimensions Rozmery AxBxC (mm)
S 7136 1X36W	1X36W	G13	6,4	T8	1305x200x100x1100
S 7158 1X58W	1X58W	G13	7,5	T8	1605x200x100x1400
S 7236 2X36W	2X36W	G13	6,7	T8	1305x200x100x1100
S 7258 2X58W	2X58W	G13	7,6	T8	1605x200x100x1400
S 7128 1X28W	1X28W	G5	5,3	T5	1305x200x100x1100
S 7154 1X54W	1X54W	G5	5,3	T5	1305x200x100x1100
S 7135 1X35W	1X35W	G5	5,8	T5	1605x200x100x1400
S 7149 1X49W	1X49W	G5	5,8	T5	1605x200x100x1400
S 7180 1X80W	1X80W	G5	5,8	T5	1605x200x100x1400
S 7228 2X28W	2X28W	G5	5,7	T5	1305x200x100x1100
S 7254 2X54W	2X54W	G5	5,7	T5	1305x200x100x1100
S 7235 2X35W	2X35W	G5	6,5	T5	1605x200x100x1400
S 7249 2X49W	2X49W	G5	6,5	T5	1605x200x100x1400
S 7280 2X80W	2X80W	G5	6,5	T5	1605x200x100x1400

### Dimensions / Rozmery

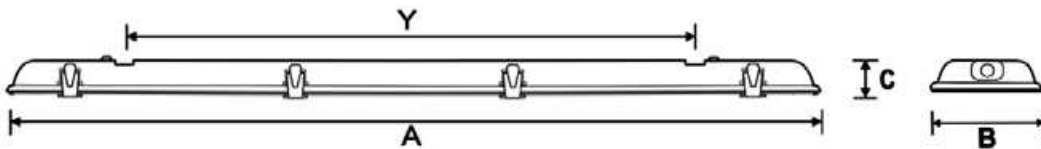

### Photometry

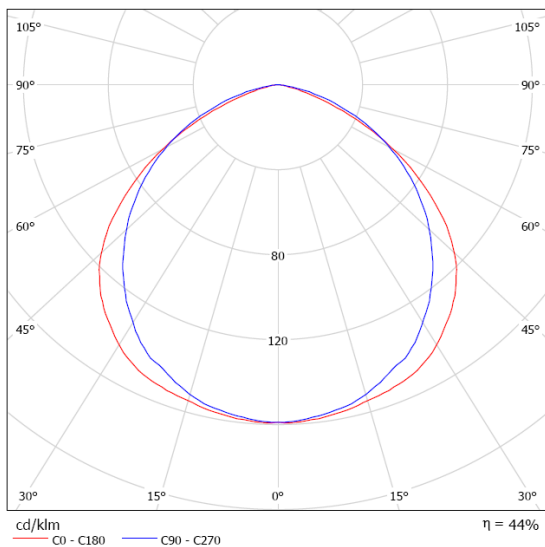

**Desing / Vyhotovenie**

*Body is made of anticorrosive (steel) metal sheet.*

*High protection degree – IP65 is guaranteed by polyurethane seal and cable fasteners.*

*Gear tray is made from trimmed sheet steel with a thickness of 0,6 mm.*

*Surface treatment – white powder coating RAL 9003.*

*Reflector is from high polished aluminum.*

*HOLDERS are made from steel.*

**DIFFUSER:**

*Glass – heat tempered (thickness: 4 mm)*

**CLIPS:**

*Clips are made from steel.*

*Two clips at one side of diffuser provide for hanging of diffuser in the body.*

*Teleso svietidla je vyrobené z antikorového plechu.*

*Vysoký stupeň krytia – IP65 je zaručený použitím silikónových tesnení a prechodiek.*

*Nosná doska elektrického príslušenstva je vyrobená z ocelového plechu hrúbky 0,6 mm, s povrchovou upravou – prášková farba RAL 9003.*

*Pre zvýšenie účinnosti svietidla je optika vyrobená z vysoko lešteného hliníka.*

*DIFÚZOR – Kalené sklo (hrúbka 4 mm) KLIPSY – Klipsy sú vyrobené z antikorového plechu.*

*Klipsy na jednej strane difúzora zabezpečujú zavesenie difúzora na telese.*